

Effect of heat flow via glazing on the productivity of a solar still

Abderrahmane Khechekhouche^{1*}, Zied Driss², Benjamin Durakovic³

¹Applied mathematical and sciences unit (AMS), Lab of LABTHOP, University of El-Oued, ALGERIA

²Laboratory of Electromechanical Systems (LASEM), ENIS, University of Sfax, TUNISIA

³International University of Sarajevo, 71210 Ilidža, BOSNIA and HERZEGOVINA

Email*: abder03@hotmail.com

Abstract – In many parts of the world, particularly in the Greater Maghreb, desalination of water by solar energy is practiced with incredible abundance. Drinking water shortage has become a major problem. Improving the efficiency of solar distillers in several laboratories around the world is still one of the major concerns of research topics. In this work we want to show that the heat flow through the glazing can also be considered as an index on the productivity of pure water from a conventional solar still.

Keywords: Solar energy; solar distiller; distilled water; drinking water.

Received: 26/11/2019 – Accepted: 25/12/2019

I. Introduction

The technique of water desalination in several countries is very developed, but each technique used in this field has its advantages and disadvantages [1-3]. Solar distillation is one of the simplest and most profitable purification techniques compared to other distillation methods because it uses a green and renewable energy source, it is solar energy. solar radiation and the main parameter in this technique and any variation of the solar intensity directly influencing the productivity of pure water in other words, the variation of the seasons has a remarkable influence on this type of distillation and this has been proven by an experimental study is made in the south-east of Algeria [4, 5]. The performance of this procedure is relatively low, but several research studies around the world have aimed at improving the production of solar stills using several techniques. Studies have focused on heating the water to be distilled, have used storage materials [6, 7], others have used a collector and a solar concentrator. Even solar PV has been used to increase water temperature in order to speed up evaporation [8, 9]. Nanofluid technology has touched the field of solar distillation and this through experimental studies done at the levels of several research laboratories [10]. The glazing of the distiller (condenser) plays a big role in solar distillation [11]. The temperature between the glazing and the water to be distilled is a good indicator of

the production of pure water. Each time the temperature difference increases this will be followed by an increase in production. This indicator is the temperature gradient [12].

In this work we show that the heat transfer through the glazing in a solar still can be considered as a new indicator on the production of pure water.

II. Method and discussion

II.1. Description of the solar distiller

Figure 1 shows a solar still, this device which can be easily designed by equipment available in the markets. It is designed essentially from a wood box, a glass cover and a PCV tube.



Figure.1. Single slope solar distiller

II.2. Thermocouples locations

Temperature measurements are made by means of five thermocouples positioned as shown in Figure 2.

- Temperature of the inside face of the glazing.
- Temperature of the outside face of the glazing.
- Ambient temperature.

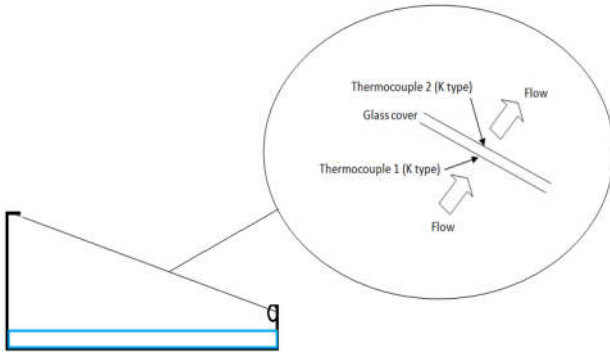


Figure.2. Locations of the used thermocouples

II.3. Characterization of glass

Glasses constitute an extremely varied set of products whose properties are innumerable. These depend mainly on the composition, especially thermal.

- The thermal conductivity of the glass: 1 W/(m K)
- Glass thickness: 0.004 m
- Glass surface: 1/4 m²
- Specific heat Cp: 0.8 J/g/K

II.4. Meteorological conditions of the experiments

An experiment was carried out at the University of El-Oued (south-eastern Algeria). The experiment was made on May 5, 2018 during a clear and calm windless day. Table 1 shows the experimental weather conditions.

TABLE 1 METEOROLOGICAL CONDITIONS (Summer May 5, 2018)	
Sunrise	05:41 am
Sunset	07:19 pm
Ambient temperature	26-35°C
Atmospheric pressure	1013 mb

III. Result and discussion

There are many meteorological factors such as solar radiation; the ambient temperature influences the operation of the distiller. The transfer of heat through the glass cover is a remarkable indicator on the productivity of the solar still. The results obtained are illustrated in the following figures.

III.1. Solar radiation evolution

Figure 4 shows the solar radiation evolution in W/m² during the day time (in hours). The radiation increases gradually until reaching a maximum value between 11:00h and 14:00h. Solar radiation is the key parameter in solar distillation.

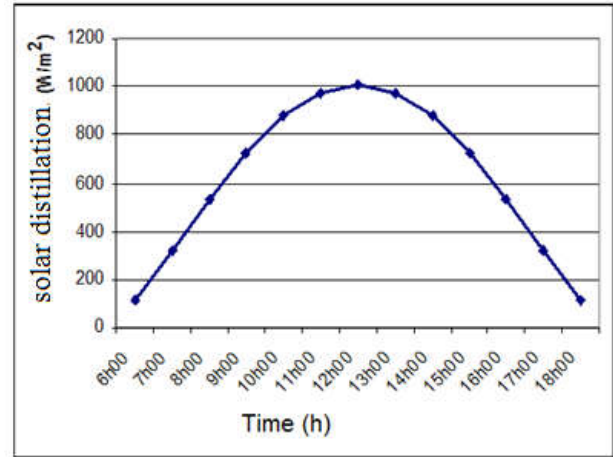


Figure.4. Evolution of solar radiation

III.2. Ambient temperature

Figure 5 shows the evolution of the ambient temperature as a function of time. The ambient temperature is growing until reaching a maximum value of 31 °C and this at 15:00h. The ambient temperature is also a factor influencing the productivity of pure water from a solar still.

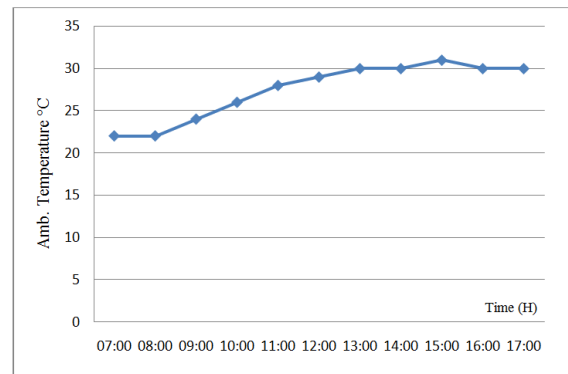


Figure.5. Evolution of ambient temperature

III.3. Variation in the temperature difference at the edge of the glass cover

Figure 6 shows the variation in the temperature difference at the edge of the glass cover of the solar still. This difference in temperature increases over time as well as productivity. This difference is maximum at 14:00h and the productivity is also maximum with 108.2 ml as shown in Figure 7.

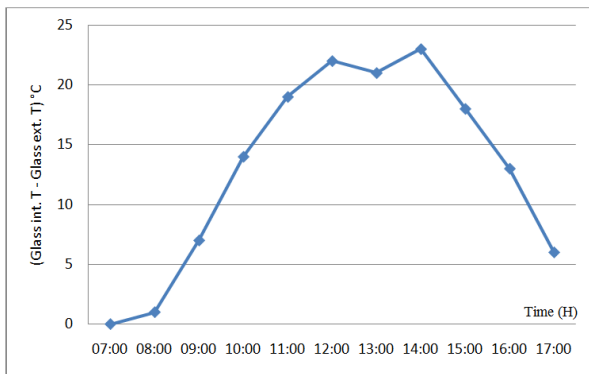


Figure.6. Evolution of the temperature difference at the edge of the glass cover

III.4. Productivity of pure water

Figure 7 shows the evolution of the pure water production as a function of time. The productivity is maximum at 14:00h and notes that the temperature difference between the two faces of the glazing is also maximum at 14:00h so we can say that there is a relationship between the outgoing flow via the glazing and the productivity of the solar still.

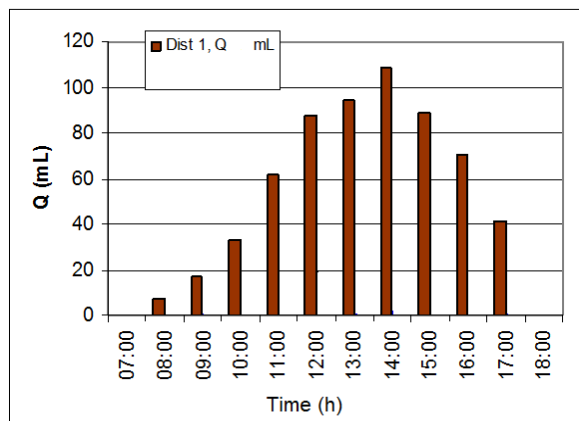


Figure.7. Productivity of distilled water

IV. Conclusion

In general, the temperature gradient is a good indicator to follow the productivity of pure water from a solar still, but we can say that the flow leaving via the glazing of a still may also be a productivity indicator. So we can say:

- The transfer of heat through the glass cover of a solar still gives a very remarkable indication of the productivity of the distilled water.
- This difference is maximum at 14:00 with ($\Delta T=31^{\circ}\text{C}$) and the productivity is also maximum with 108.2 ml

Reference

- [1] Hasan F. Khazaal, Haider Th. Salim Alrikabi, Faisal Theyab Abed, Salah Ibrahim Kadhm. Water desalination and purification using desalination units powered by solar panels. Vol 7, n° 3, 2019. Periodicals of Engineering and Natural Sciences.
- [2] N. Ghaffour, J. Bundschuh, H. Mahmoudi, M.F.A. Goosen. Renewable energy-driven desalination technologies: A comprehensive review on challenges and potential applications of integrated systems, *Desalination*, 356, 94-114 (2015).
- [3] K. Choon Ng, K. Thu, S. Jin Oh, L. Ang, M. Wakil Shahzad, A. Bin Ismail, Recent developments in thermally-driven seawater desalination: Energy efficiency improvement by hybridization of the MED and AD cycles, *Desalination*, 356; 255-270 (2015).
- [4] A. Khechekhouche, A. Boukhari, Z. Driss, N. Benhissen, Seasonal effect on solar distillation in the El-Oued region of south-east Algeria, *international of energetica*, 2, 1, 42-45 (2017).
- [5] Abderrahmane Khechekhouche, Boubaker Benhaoua, Abd Elnaby kabeel. Traditional Solar distiller improvement by a single external refractor under the climatic conditions of the El Oued region, Algeria. *Desalination and water treatment*. (in press) 2019.
- [6] Abderrahmane Khechekhouche, Boubaker Benhaoua, Abd elnaby Kabeel, Mohammed El Hadi Attia, Wael M. El-Maghlany. Improvement of solar distiller productivity by a black metallic plate of Zinc as a thermal storage material. *Journal of Testing and Evaluation*, Vol 49, no 2, (in press), 2019.
- [7] A.E. Kabeel, Mohamed Abdelgaied, Amr Essa, "Enhancing the performance of single basin solar still using high thermal conductivity sensible storage materials". *Journal of Cleaner Production*, Vol 183, 2018, pp. 20-25.
- [8] A.M. Manokar, M. Vimala, R. Sathyamurthy, A. E. Kabeel, D. Prince Winston, Ali J. Chamkha. "Enhancement of potable water production from an inclined photovoltaic panel absorber solar still by integrating with flat-plate collector". *Environ Dev Sustain* (2019)
- [9] Gurukarthik Babu Balachandran, Prince Winston, David Aravind, Bhaskar Panayilvedu Vijayakumar, Abd Elnaby Kabeel, Muthu Manokar Athikesavan, Ravishankar Sathyamurthy, "Enhancement of PV/T-integrated single slope solar desalination still productivity using water film cooling and hybrid composite insulation", *Environ Sci Pollut Res* (2019).
- [10] Hitesh Panchal, Ravishankar Sathyamurthy, A. E. Kabeel, S. A. El-Agouz, DSilva Rufus, T.

- Arunkumar, A. Muthu Manokar, D. Prince Winston, Atul Sharma, Nishant Thakar, Kishor Kumar Sadasivuni, “Annual performance analysis of adding different nanofluids in stepped solar still”, *Journal of Thermal Analysis and Calorimetry*, Vol. 138, No 5, 2019, pp. 3175–3182.
- [11] Abderrahmane Khechekhouche, Benhaoua Boubaker, Mruthu Manokar, Ravishankar Sathyamurthy, Abd Elnaby Kabeel. “Exploitation of an insulated air chamber as a glazed cover of a conventional solar still”. *Heat Transfer - Asian Research*. Vol 48, issue 5, 2019, pp 1563-1574.
- [12] A. Khechekhouche, B. Ben Haoua, Z. Driss, Solar distillation between a simple and double-glazing, *revue de mécanique*. Vol 2, No 2. 2017